


ExxonMobil

Performance PE

Creating recycled solutions. Together.

EU target for recycled plastic

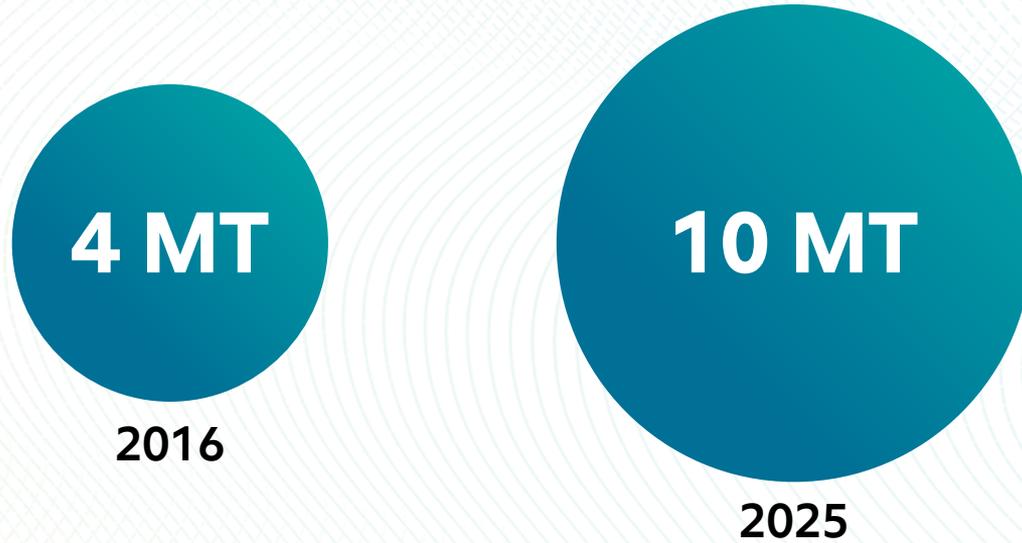

Ship it

Cover it

**Closing
the
loop**

Shrink it

with
**ExxonMobil
performance PE**

Ship it: Case study

Multi-cycle recycled heavy duty bags made with Exceed™ XP performance PE in collaboration with Reifenhauser



Recycled 3 times; 7 extrusion cycles



No upgauging



Excellent toughness



Smooth processing



Passed filling trial and bag drop test

No compromise on mechanical properties

Silage cover film with Exceed™ XP performance PE and 50% post-consumer recycled PE

No compromise on mechanical properties



Outstanding
dart impact



Bubble
stability



50% recycled
PE



Good tear
resistance



Shrink it: Case study

**Collation shrink film developed with W&H:
30% recycled PE + 70% ExxonMobil performance PE**



No compromise on mechanical properties



Toughness



Optical
properties



No
upgauging



30% recycled
PE

Ship it

Cover it

Closing
the
loop

Shrink it

with
ExxonMobil
performance PE

ExxonMobil

©2019 ExxonMobil. ExxonMobil, the ExxonMobil logo, the interlocking "X" device and other product or service names used herein are trademarks of ExxonMobil, unless indicated otherwise. This document may not be distributed, displayed, copied or altered without ExxonMobil's prior written authorization. To the extent ExxonMobil authorizes distributing, displaying and/or copying of this document, the user may do so only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. You may not copy this document to or reproduce it in whole or in part on a website. ExxonMobil does not guarantee the typical (or other) values. Any data included herein is based upon analysis of representative samples and not the actual product shipped. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We based the information on data believed to be reliable on the date compiled, but we do not represent, warrant, or otherwise guarantee, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, suitability, accuracy, reliability, or completeness of this information or the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of or related to anyone using or relying on any of the information in this document. This document is not an endorsement of any non-ExxonMobil product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "ExxonMobil Chemical" and "ExxonMobil" are each used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliate either directly or indirectly stewarded.